



GROUNDROW



PREPARING THE LUI CYC / FLOOD FOR USE AS A GROUNDROW

To modify the **LUI** Cyc / Flood for groundrow operation, reverse the colour cassette assembly by removing the two screw pivot hinges located on each side of the luminaire.

Invert the colour cassette, then replace the two screws in the new hinge position.

Put the 2 groundrow screw jack feet (Order Code 15HLGDSF) in the threaded holes on the underside of the luminaire.

Swing the yoke to the rear of the luminaire, and position to lift the luminaire off the ground. Adjust the focus by screwing the feet.

WARNING: In the groundrow position the luminaire runs hot, please ensure it is placed on a suitable surface.

FEATURES

- The LUI range uses the 1000W K4 or 625W P2/10 R7 lamps (189mm).
- Make your own battens using the HUI slot lock joint system that allows a number of units to be locked together.
- Relamp without having to remove the filter or break focus.
- Filter holder is held captive by spring hinged extruded cover that also blocks unwanted light spill.
- One handed operation only required to focus, change filters etc.
- Mains Power Disconnect - microswitches isolate the mains supply when opening to relamp (phase and neutral) protecting against a student or technician inserting a lamp into a live socket.
- Safety glass ensures that in the unlikely event of a lamp exploding that the remains are held captive within the luminaire.
- Shape the beam and contain glare with the four-door barndoor accessory – fits all models.
- Fully tested and compliant to CE standards.


LAMPS: 220V–240V

1000W	K4	24,000 lumens	2000 hours average life
625W	P2/10	16,250 lumens	150 hours average life

CONNECTOR PANELS & OPTIONS

To suit your needs: www.seleconlight.com/connectors.html

PHYSICAL DATA

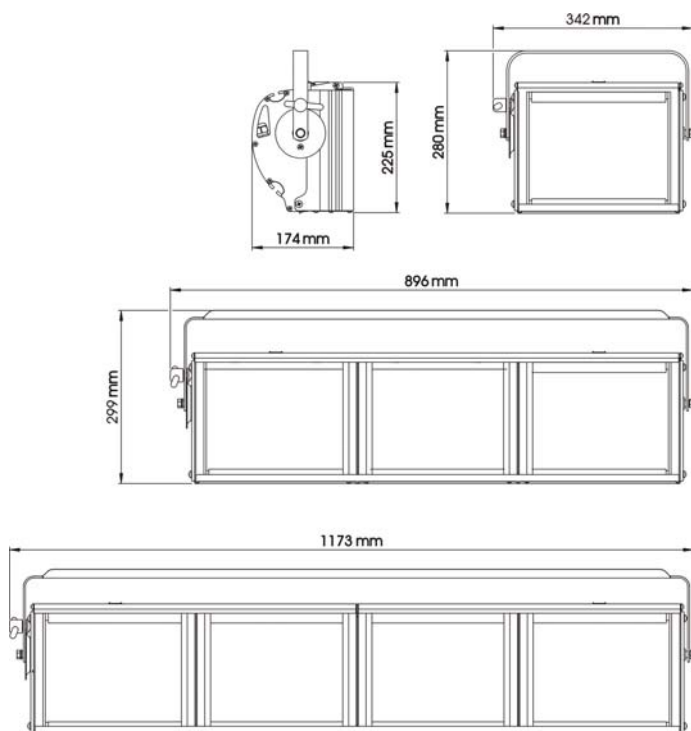

Weight:	Single	3 way	4 way
	4.1kg	10.7kg	14kg

Colour Frame Size:	265mm x 203mm
Included:	1 x colour frame per cell, 1 x M12 suspension bolt set & instruction leaflet.

ORDER CODES: LUMINAIRES & ACCESSORIES

LUI Cyc 1 – 1000W	10LUICYC1
LUI Cyc 3 Batten – 1000W, cable tails	10LUICYC3
LUI Cyc 3 Batten – 1000W, connector terminal	10LUICYC3G
LUI Cyc 4 Batten – 1000W, cable tails	10LUICYC4
LUI Cyc 4 Batten – 1000W, connector terminals	10LUICYC4G
LUI Flood 1 – 1000W	10LUIFLD1
LUI Flood 3 Batten – 1000W, cable tails	10LUIFLD3
LUI Flood 3 Batten – 1000W, connector terminals	10LUIFLD3G
LUI Flood 4 Batten – 1000W, cable tails	10LUIFLD4
LUI Flood 4 Batten – 1000W, connector terminals	10LUIFLD4G
Groundrow screw jack feet (set of 2)	15HLGDSF
Joiner Set (2 of) slot locks	15HLJ
Barndoor – 4 leaf	15HUIBD
Spare Colour Frame	15HLCF

Selecon reserves the right to change the specifications without notice (09/06).