


AQUAFOG 3300™

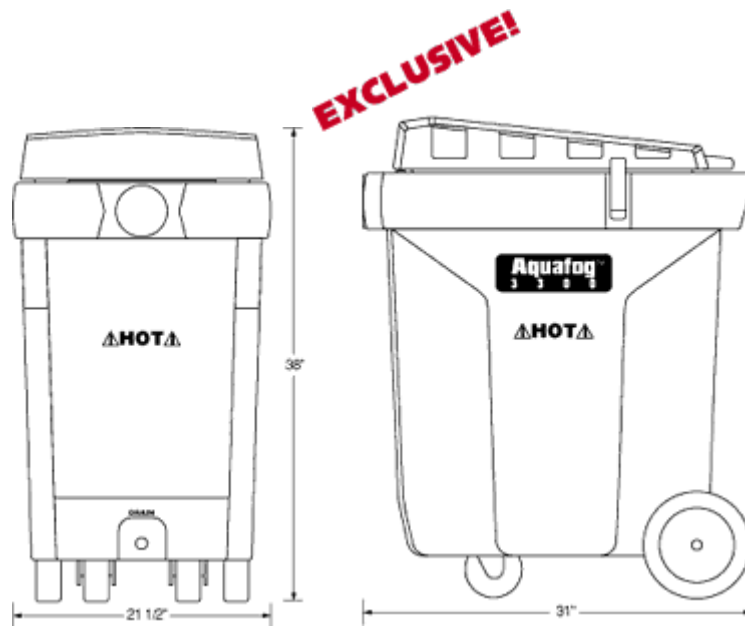

SPECIFICATIONS

Tank

| | |
|---------------------|--|
| Material | High temperature plastic polymer |
| Dimensions | 21 1/2"x 31"x 38"(including casters) (546mm x 787mm x 965mm) |
| Water capacity | 28 gallons (106 litres) |
| Ice capacity | 75 lbs. (34 kg.) |
| Casters | 3 1/2"(88.9mm) swivel front, 8"(203mm) fixed rear |
| Hose vent | 4"(101.6mm) molded into tank |
| Fill Door | 20"x 30"(508mm x 762mm) |
| Weight empty | 115 lbs. (52kg.) |
| Shipping weight | 130 lbs. (59kg.) |
| Weight fully loaded | 455 lbs. (208.19kg.) |

Plumbing

| | |
|----------|--|
| Pump | Stainless steel 10GPM (37.85 litres/min.) |
| Fittings | All stainless, brass or high temperature plastic |

Electrical

| | |
|-----------------------|---|
| Voltage | 120v, 230v available |
| Heating elements | 120v 1650 watt; 230v 3000 watt (two) screw in |
| Thermostat | Adjustable automatic control (100°F-160°F) (38°C-71°C) |
| Overtemperature: | 175°F (79°C) cutout, manual reset |
| Low water cutout | Turns off heaters when water is low |
| Blower | 240 CFM axial (6.799 CMM) |
| Circuit breakers-Type | 20 amp on heating element 2 amp (lighted) on fan & pump |