



GROUNDROW

PREPARING THE HUI CYC / FLOOD FOR USE AS A GROUNDROW



To modify the **HUI** Cyc / Flood for groundrow operation, reverse the colour cassette assembly by removing the two screw pivot hinges located on each side of the luminaire.

Invert the colour cassette, then replace the two screws in the new hinge position.

Put the 2 groundrow screw jack feet (Order Code 15HLGDSF) in the threaded holes on the underside of the luminaire.

Swing the yoke to the rear of the luminaire, and position to lift the luminaire off the ground. Adjust the focus by screwing the feet.

WARNING: In the groundrow position the luminaire runs hot, please ensure it is placed on a suitable surface.

FEATURES

- The HUI range uses either the 800W P2/11 lamp or the standard 300W K9 or 500W K1 THD lamps (118mm).
- Make your own battens using the HUI slot lock joint system that allows a number of units to be locked together.
- Relamp without having to remove the filter or break focus.
- Filter holder is held captive by spring hinged extruded cover that also blocks unwanted light spill.
- One handed operation only required to focus, change filters etc.
- Mains Power Disconnect - microswitches isolate the mains supply when opening to relamp (phase and neutral) protecting against a student or technician inserting a lamp into a live socket.
- Safety glass ensures that in the unlikely event of a lamp exploding that the remains are held captive within the luminaire.
- Shape the beam and contain glare with the four-door barndoor accessory – fits all models.
- Fully tested and compliant to CE standards.




LAMPS:220V-240V

800W	P2/11	24,000 lumens	150hrs average life
500W	K1	9,900 lumens	2,000hrs average life
300W	K9	5,600 lumens	2,000hrs average life
200W	K11	3,520 lumens	2,000hrs average life

CONNECTOR PANELS & OPTIONS

To suit your needs: www.seleconlight.com/connectors.html

PHYSICAL DATA

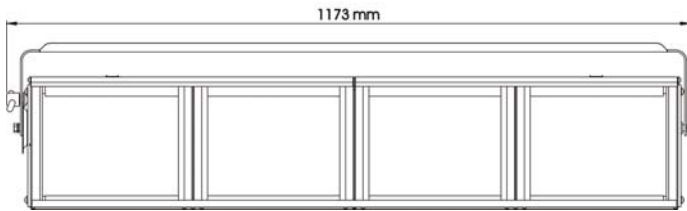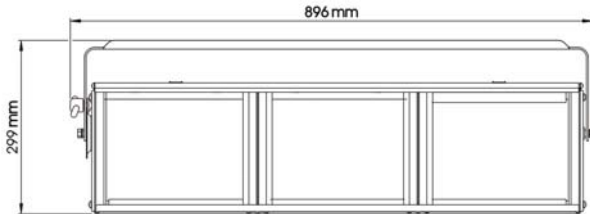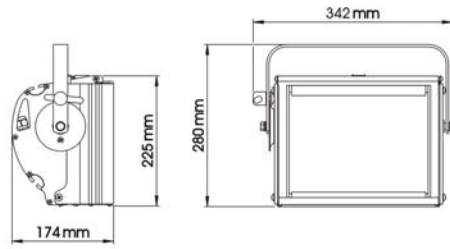

Weight:	Single	3 way	4 way
	4.1kg	10.7kg	14kg

Colour Frame Size: 265mm x 203mm
Included: 1 x colour frame per cell, 1 x M12 suspension bolt set & instruction leaflet.

ORDER CODES: LUMINAIRES & ACCESSORIES

HUI Cyc 1 – maximum 800W	12HUICYC1
HUI Cyc 3 Batten – max 800W, cable tails	12HUICYC3
HUI Cyc 3 Batten – max 800W, connector terminals	12HUICYC3G
HUI Cyc 4 Batten – max 800W, cable tails	12HUICYC4
HUI Cyc 4 Batten – max 800W, connector terminals	12HUICYC4G
HUI Flood 1 – maximum 800W	12HUIFLD1
HUI Flood 3 Batten – max 800W, cable tails	12HUIFLD3
HUI Flood 3 Batten – max 800W, connector terminals	12HUIFLD3G
HUI Flood 4 Batten – max 800W, cable tails	12HUIFLD4
HUI Flood 4 Batten – max 800W, connector terminals	12HUIFLD4G
Groundrow screw jack feet (set of 2)	15HLGDSF
Joiner Set (2 of) slot locks	15HLJ
Barndoor – 4 leaf	15HUIBD
Spare Colour Frame	15HLCF

Selecon reserves the right to change the specifications without notice (09/06).

